




Opto-Link
Corporation Ltd

Polarization Maintaining Couplers

(Wavelength: 1053nm)

The Polarization Maintaining (PM) Coupler Provides optical signal splitting with accurate tap ratio while preserving the state of polarization. By combining thin film filter technology and PM collimators, the PM coupler features has low insertion loss, high return loss, high extinction ratio and environmentally stable.

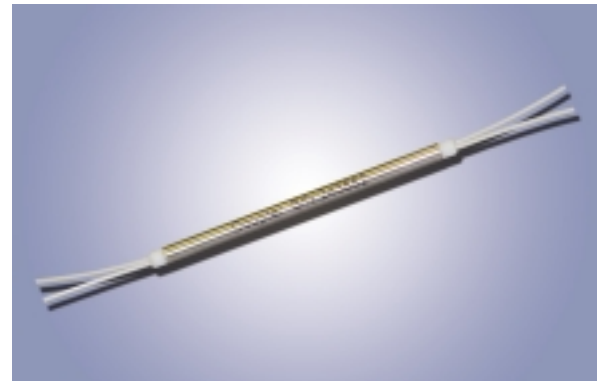

Applications

- Test Equipment
- Raman Amplifier
- Erbium-Doped Fiber Amplifier
- Sensor System

Features

- Ultra Low Insertion Loss
- High Return Loss
- High Extinction Ratio
- Accurate Coupling Ratio
- Wide Bandwidth
- Environmentally Stable



Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Maintaining Couplers at 1053nm

Parameter	Values	Units
Center Wavelength	1053	nm
Operating Wavelength Range	+/- 20	nm
Type	1 x 2	--
Max. Excess Loss	0.8	dB
Max. Uniformity	0.6	dB
Tap Ratio	1+/-0.2%, 2+/-0.4%, 5+/-1%, 10%, 20% and 50%	--
Min. Return Loss	50	dB
Min. Extinction Ratio	22	dB
Max. Optical Power	300	mW
Max. Tensile Load	5	N
Operating Temperature	-5 to +70	°C
Storage Temperature	-40 to +85	°C
Fiber Type	HI1060 or PM Panda Fiber on Tap Port PM Panda Fiber on Input & Output Port	

*Above specifications are for device without connectors.

*Above specifications are for device with fast axis blocked.

ORDERING CODES

OLCPL - P - [] - [] - [] - [] - []

Port	Code
1x2	12
2x2	22

Wavelength	Code
1053 nm	105
Specify	X

Coupling Ratio	Code
50/50	50
40/60	40
30/70	30
20/80	20
Specify	XX

Lead Types	Code
250 µm bare fiber	25
900 µm loose tube	90
3 mm loose cable	3

Connector Type	Code
No Connectors	NC
FC/PC	FP
SC/PC	SP
FC/APC	FA
SC/APC	SA
LC/PC	LP
MU/PC	MP
Others	XX

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2006 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com