




Opto-Link  
Corporation Ltd

## Polarization Maintaining Couplers

The Polarization Maintaining (PM) Coupler Provides optical signal splitting with accurate tap ratio while preserving the state of polarization. By combining thin film filter technology and PM collimators, the PM coupler features has low insertion loss, high return loss, high extinction ratio and environmentally stable.

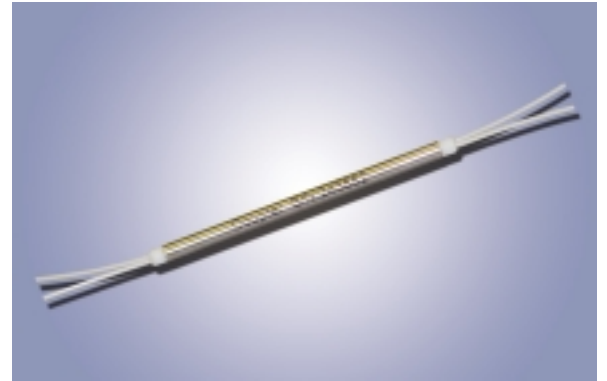

### Applications

- Test equipments
- Raman Amplifier
- Erbium-Doped Fiber Amplifier
- Sensor System

### Features

- Ultra low insertion loss
- High Return Loss
- High Extinction Ratio
- Accurate Coupling Ratio
- Wide Bandwidth
- Environmentally stable



Opto-Link  
Corporation Ltd

## SPECIFICATIONS

### Polarization Maintaining Couplers at 1040nm

Parameter	Values		Units
Center Wavelength	1040		nm
Operating Wavelength Range	+/- 20		nm
Type	1x2	2x2	--
Max. Excess Loss	0.9	1.2	dB
Max. Uniformity	0.6	0.6	dB
Tap Ratio	1+/-0.2%, 2+/-0.4%, 5+/-1%, 10%, 20% and 50%		--
Min. Return Loss	50		dB
Min. Extinction Ratio	20		dB
Max. Optical Power	300		mW
Max. Tensile Load	5		N
Operating Temperature	-5 to +70		°C
Storage Temperature	-40 to +85		°C
Fiber Type	PM980 Panda Fiber or HI1060 on Tap Port PM 980 Panda Fiber on Input & Output Port		

\*Above specifications are for device without connectors.

### Polarization Maintaining Couplers at 1064nm

Parameter	Values		Units
Center Wavelength	1064		nm
Operating Wavelength Range	+/-20		nm
Type	1x2	2x2	--
Max. Excess Loss	0.8	1.2	dB
Max. Uniformity (only for 50/50)	0.6	0.8	dB
Tap Ratio	1+/-0.2%, 2+/-0.4%, 5+/-1%, 10% & 50% or Specify		--
Min. Return Loss	50		dB
Min. Extinction Ratio	20		dB
Max. Optical Power	300		mW
Max. Tensile Load	5		N
Operating Temperature	-5 to +70		°C
Storage Temperature	-40 to +85		°C
Fiber Type	PM980 Panda Fiber or HI1060 on Tap Port PM 980 Panda Fiber on Input & Output Port		

\*Above specifications are for device without connectors.

## ORDERING CODES

OLCPL - P - [ ] - [ ] - [ ] - [ ] - [ ]

Port	Code
1x2	12
2x2	22

Wavelength	Code
1040 nm	104
1064 nm	106
1550 nm	155
Specify	X

Coupling Ratio	Code
50/50	50
40/60	40
30/70	30
20/80	20
Specify	XX

Lead Types	Code
250 µm bare fiber	25
900 µm loose tube	90
3 mm loose cable	3

Connector Type	Code
No Connectors	NC
FC/PC	FP
SC/PC	SP
FC/APC	FA
SC/APC	SA
LC/PC	LP
MU/PC	MP
Others	XX

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2005 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: [contact@optolinkcorp.com](mailto:contact@optolinkcorp.com) Website: [www.optolinkcorp.com](http://www.optolinkcorp.com)