




Opto-Link
Corporation Ltd

Polarization Maintaining Couplers

(Wavelength: 980nm)

The Polarization Maintaining (PM) Coupler Provides optical signal splitting with accurate tap ratio while preserving the state of polarization. By combining thin film filter technology and PM collimators, the PM coupler features has low insertion loss, high return loss, high extinction ratio and environmentally stable.

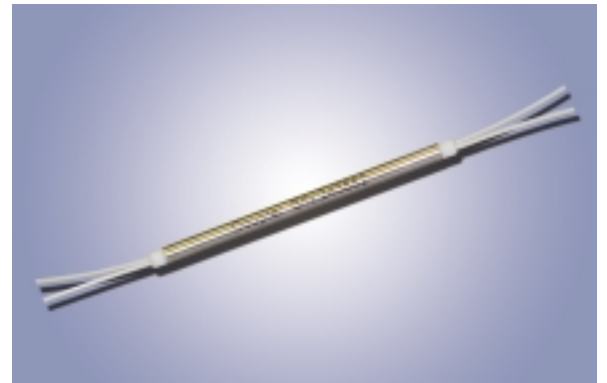

Applications

- Test Equipment
- Raman Amplifier
- Erbium-Doped Fiber Amplifier
- Sensor System

Features

- Ultra Low Insertion Loss
- High Return Loss
- High Extinction Ratio
- Accurate Coupling Ratio
- Wide Bandwidth
- Environmentally Stable



Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Maintaining Couplers at 980nm

Parameter	Values	Units
Center Wavelength	980	nm
Operating Wavelength Range	+/- 20	nm
Type	1 x 4	--
Max. Insertion Loss	7.7	dB
Max. Wavelength Dependent Loss	0.5	dB
Max. Uniformity	0.8	dB
Min. Directivity	50	dB
Min. Return Loss	50	dB
Min. Extinction Ratio	23	dB
Max. Temperature Dependent Loss	0.006	dB/°C
Operating Temperature	-5 to +70	°C
Storage Temperature	-40 to +85	°C
Fiber Type	PM Panda Fiber	--
Dimensions	160 x 140 x 10	mm

*Above specifications are for device without connectors.

*Above specifications are for device with fast axis blocked.

ORDERING CODES

OLCPL - P - [] - [] - [] - [] - []

Port	Code
1x4	14

Wavelength	Code
980 nm	098
Specify	X

Coupling Ratio	Code
25/25/25/25	25

Lead Types	Code
900 µm loose tube	90
3 mm loose cable	3

Connector Type	Code
No Connectors	NC
FC/PC	FP
SC/PC	SP
FC/APC	FA
SC/APC	SA
Others	XX

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2007 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com