




Opto-Link
Corporation Ltd

Polarization Beam Combiner / Splitter

The polarization beam combiner / splitter is a compact lightwave component that combines two orthogonal polarization signals into the output fiber. This device has typical configuration uses two PM fibers for the input and the SM fiber for the output. It can also be used as a beam splitter.

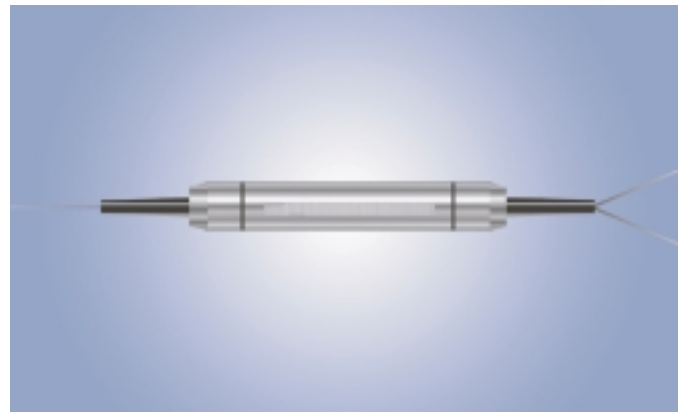

Applications

- Test equipments
- Raman Amplifier
- Erbium-Doped Fiber Amplifier
- Sensor System

Features

- Low Insertion loss
- High Return Loss
- High Extinction Ratio
- Accurate Coupling Ratio
- Environmentally stable



Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Beam Combiner / Splitter at 1310nm,1480nm or 1550nm

Parameter	Values		Units
Center Wavelength	1310, 1480 or 1550	1310/1550	nm
Operating Wavelength Range	+/-40		nm
Insertion Loss	0.4 (Typ), 0.6 (Max)	0.8 (Typ), 1.0 (Max)	dB
Min. Extinction Ratio (Splitter Only)	22		dB
Min. Return Loss	50		dB
Min. Directivity	50		dB
Max. Optical Power (CW)	2000		mW
Fiber Type	PM Panda Fiber on Port 1 and 2, SMF-28 or PM Panda Fiber on Port 3		
Max. Tensile Load	5		N
Operating Temperature	-5 to +70		°C
Storage Temperature	-40 to +85		°C

*Above specifications are for device without connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

Polarization Beam Combiner / Splitter at 1064nm

Parameter	Values		Units
Center Wavelength	1064		nm
Operating Wavelength Range	+/-20		nm
Insertion Loss	0.6 (Typ), 0.8 (Typ)		dB
Min. Extinction Ratio (Splitter Only)	22		dB
Min. Return Loss	50		dB
Min. Directivity	50		dB
Max. Optical Power	500		mW
Fiber Type	PM 980 Panda Fiber on Port 1 and 2, HI 1060 or PM Panda Fiber on Port 3		
Max. Tensile Load	5		N
Operating Temperature	-5 to +70		°C
Storage Temperature	-40 to +85		°C

*Above specifications are for device without connectors.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

ORDERING CODES

OLCS - [] - [] - [] - [] - [] - []

Port	Code	Wavelength	Code	Fiber Types	Code	Fiber Type on Port 3	Code	Fiber Length	Code
1x2	12	1064 nm	106	250 μm Panda fiber	25	SMF -28	SM28	0.75m	75
		1310 nm	131	400 μm Panda fiber	40	Slow axis align 45degree to port 1	S145	Others	XX
		1550 nm	155	900 μm loose tube	90	Slow axis align to port 1	S1		
		1310 & 1550nm	135	Others	XX	Others	XX		
		Others	XX						

Connector Type	Code
No Connector	NC
FC/PC	FP
SC/PC	SP
FC/APC	FA
SC/APC	SA
LC/PC	LP
MU/PC	MP
Others	XX

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2006 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com