




Opto-Link  
Corporation Ltd

## SPECIFICATIONS

### Polarization Maintaining Optical Circulators

Parameter	Values	Units
Center Wavelength	980	nm
Min. Extinction Ratio	20	dB
Min. Isolation, 23°C, all polarization states	25	dB
Typ. Insertion Loss, 23°C	1.3	dB
Max. Insertion Loss, 23°C	1.5	dB
Min. Return Loss (Input/Output)	45/45	dB
Max. Average Optical Power	3	W
Max. Peak Power for ns pulse	10	kW
Max. Tensile Load	5	N
Fiber Type	PM980 Panda Fiber	--

### Package Dimension

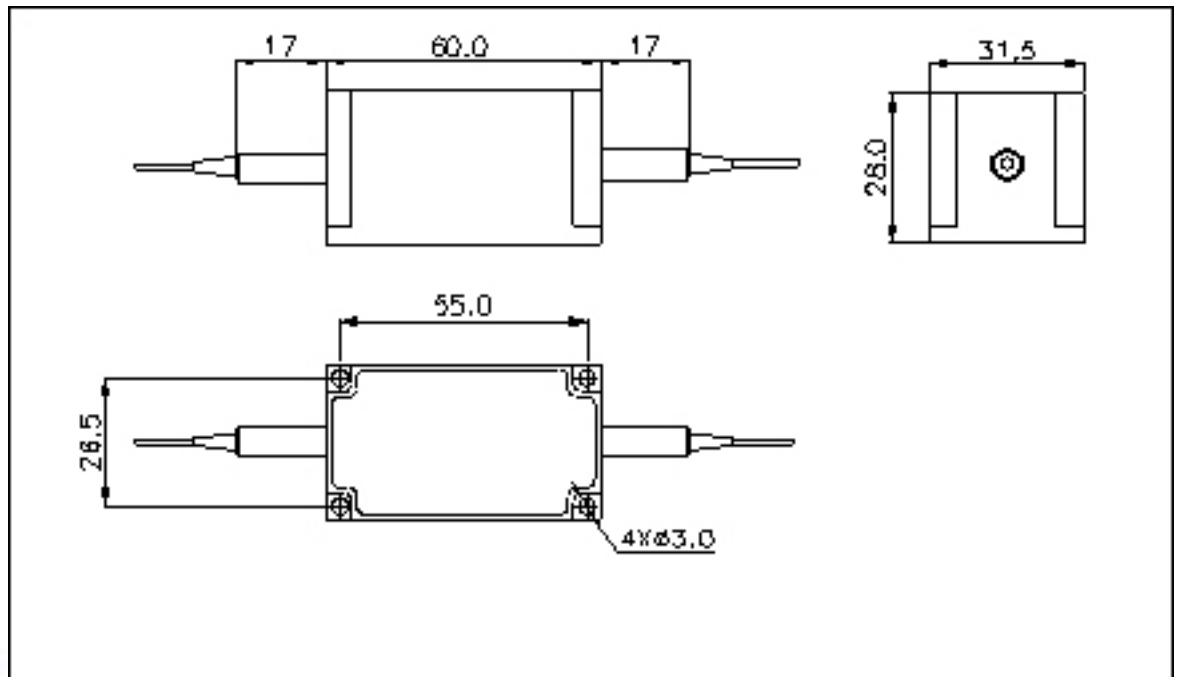

## ORDERING CODES

OLCIR - P - [ ] - [ ] - [ ] - [ ] - [ ]

Port	Code
3 ports	3

Handling Power	Code
3W	3W

Connector Type	Code
No Connector	NC

Wavelength	Code
1064 nm	106

Cable Diameter	Code
900 um Loose tube	90

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2009 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: [contact@optolinkcorp.com](mailto:contact@optolinkcorp.com) Website: [www.optolinkcorp.com](http://www.optolinkcorp.com)