




Opto-Link
Corporation Ltd

Fiber Optic Collimators

(Wavelength: 1310nm & 1550nm)

Fiber Optic Collimator is designed to focus the light exiting a fiber to a specific beam diameter or spot size. It can be used in various active and passive optical components including fiber optic sensors, Erbium-doped fiber amplifiers (EDFAs), dense wavelength division multiplexer (DWDM), circulators and isolators.

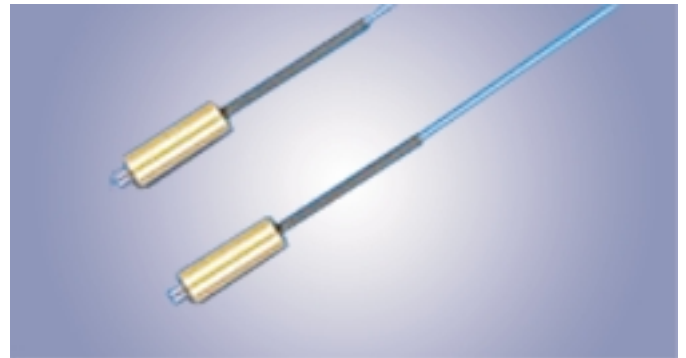

Types

- Single-Mode Fiber Collimators
- Polarization Maintaining Fiber Collimators

Applications

- EDFAs, DWDM
- Fiber Optic Sensors
- Photonic Switches
- Isolators
- Circulators
- Couplers
- Test & Measurement System

Features

- Low Insertion Loss
- Low Polarization Dependence Loss
- High Extinction Ratio (for PM Collimators)
- Excellent Return Loss
- Wide Bandwidth
- Long Working Distance
- Environmentally Stable



Opto-Link
Corporation Ltd

SPECIFICATIONS


Single Mode Fiber Collimators (1310nm & 1550nm)

Parameter	Values	Units
Center Wavelength	1310, 1550 or specify	nm
Operating Wavelength Range	+/-30	nm
Working Distance	5 or specify	mm
Typ. Insertion Loss	0.20	dB
Max. Insertion Loss	0.25	dB
Min. Return Loss	60	dB
Max. Tensile Load	5	N
Fiber Type	SMF-28 fiber or specify	--
Operating Temperature	-5 to +70	°C
Storage Temperature	-40 to +85	°C

*1L is 0.3dB higher, RL is 5dB lower for each connector added.

ORDERING CODES

Single Mode Fiber Collimators:

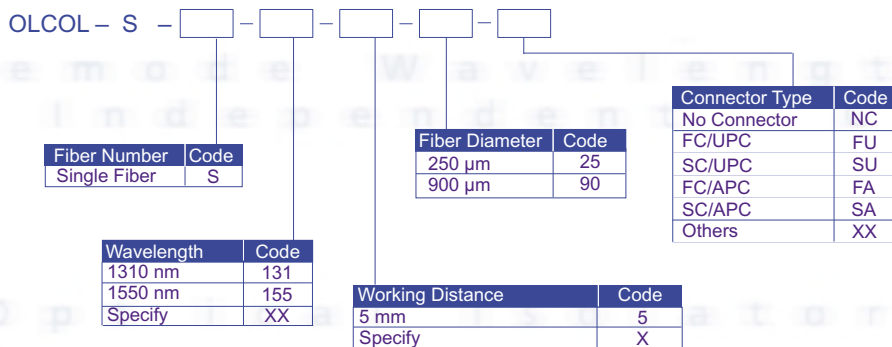

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2008 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com