



Opto-Link
Corporation Ltd

Polarization Independent Isolators

(Wavelength: 1053nm)


Fiber Optic Isolator allows light to travel through a fiber in one direction only. It minimizes back reflection and back scattering in the reverse direction for any state of polarization. The device has an epoxy-free optical path and provides high isolation with low polarization dependent loss over the operating wavelength range.

Applications

- DWDM Systems
- Fiber Optic Sensors
- EDFA
- CATV
- Laser Diode Package

Features

- High Isolation
- Low PDL
- Environmentally Stable

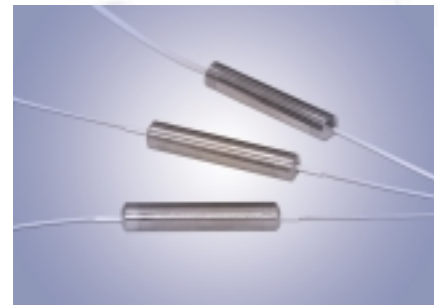

SPECIFICATIONS

Polarization Independent Isolators (1053nm)

Parameter	Single Stage	Dual Stage	Units
Center Wavelength	1053		nm
Min. Isolation	28	42	dB
Typ. Peak Isolation	38	52	dB
Insertion Loss	Typ. 1.8, Max. 2.3	Typ. 3.0, Max. 4.0	dB
Min. Return Loss (Input/Output)	55/50		dB
Max. PDL	0.15		dB
Max. Handling Power	150		mW
Operating Temperature	0 to +50		°C
Storage Temperature	-40 to +85		°C
Fiber Type	HI 1060		
Dimensions	Ø5.5 x 55		mm

*Above specifications are for device without connectors.

ORDERING CODES

OLISO - I - [] - [] - [] - []

Type and Wavelength	Code
Single Stage	S105
Dual Stage	D105

Handling Power	Code
150mW	150

Fiber Diameter	Code
250 μm	25
900 μm	90

Connector Type	Code
No Connector	NC
FC/UPC	FU
SC/UPC	SU
FC/APC	FA
SC/APC	SA
LC/UPC	LU
ST/UPC	ST
Others	XX

COPYRIGHT © 2002-2006 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com