




Opto-Link
Corporation Ltd

Polarization Independent Isolators

(Wavelength: 1064nm)

Fiber Optic Isolator allows light to travel through a fiber in one direction only. It minimizes back reflection and back scattering in the reverse direction for any state of polarization. The device has an epoxy-free optical path and provides high isolation with low insertion loss over a wide wavelength range. It can be used in high power applications.

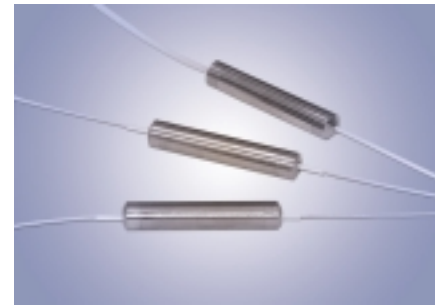

Types

- Polarization Independent Isolators
 - Single Stage / Dual Stage
- 1064nm Central Wavelength

Applications

- DWDM Systems
- Fiber Optic Sensors
- EDFAs
- CATV
- Laser Diode Package

Features

- High Power (up to 3000 mW)
- High Isolation
- Low Insertion Loss
- Low Polarization Dependent Loss
- Wide Bandwidth
- Environmentally Stable



Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Independent Isolators (1064nm)

Parameter	Single Stage	Dual Stage	Units
Center Wavelength	1064		nm
Typ. Peak Isolation	40	55	nm
Min. Isolation at 23°C; C.W. +/-10nm, all polarization states	35	45	dB
Insertion Loss at C.W.; all polarization states	1.5(Typ), 2.0(Max)	2.4(Typ),3.4(Max)	dB
Min. Return Loss (Input/Output)	55/50		dB
Max. PDL at 23°C	0.1		dB
Max. Optical Power (CW)	300		mW
Max. Tensile Load	5		N
Fiber Type	HI 1060		--
Operating Temperature	-5 to +50		°C
Storage Temperature	-40 to +85		°C
Dimensions	Ø5.5 x 55		mm

*Above specifications are for device without connectors.

High Power Polarization Independent Isolators (1064nm)

Parameter	Single Stage		Units
Center Wavelength	1064		nm
Isolation	35(Typ), 30(Min)	35(Typ), 30(Min)	dB
Insertion Loss, all polarization states	1.2(Typ), 1.5(Max)	1.0(Typ),1.2(Max)	dB
Min. Return Loss (Input/Output)	50/50		dB
Max. PDL at 23°C	0.1	0.15	dB
Max. Optical Power (CW)	1000	3000	mW
Max. Tensile Load	5		N
Fiber Type	HI 1060		--
Operating Temperature	0 to +50		°C
Storage Temperature	-20 to +75		°C
Dimensions	Ø7.0 x 60	Ø28 x 110 x 45	mm

*Above specifications are for device without connectors.

ORDERING CODES

OLISO - I - [] - [] - [] - []

Type and Wavelength	Code
1064 nm	Single Stage S106
	Dual Stage D106

Handling Power	Code
300mW	300
1000mW	1000
3000mW	3000

Fiber Diameter	Code
250 µm	25
900 µm	90
3 mm	3

Connector Type	Code
No Connector	NC
FC/UPC	FU
SC/UPC	SU
FC/APC	FA
SC/APC	SA
Others	XX

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2009 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com