



Opto-Link
Corporation Ltd

Optical Switch

Optical Switches are designed following the standard of Telcordia GR-1029. They are compact-sized mechanical switches with excellent reliability. They are widely used in network switching, optical add/drop multiplexer (OADM), optical fiber ring protection and optical cross and connection (OXC) system. The switches are available with both the latching and non-latching configuration.



Applications

- Optical Add/Drop
- Fiber Optic Ring Protection
- Optical Cross Connection

Features

- On/Off, Add/Drop or Full Configuration
- Compact Package
- Latching or Non-Latching Available



Opto-Link
Corporation Ltd


SPECIFICATIONS

2x4 Optical Switch

Parameter		Units
Operating Wavelength	1310, 1550, 1310/1550	nm
Switch Type	2 x 4	--
Insertion Loss	< 1.2	dB
Return Loss	> 45	dB
Cross Talk	> 55	dB
Polarization Dependent Loss (PDL)	< 0.1	dB
Repeatability	+/-0.05	dB
Life Time	> 1,000,000	cycle
Typ. Switch Speed	10	ms
Fiber Type	SMF-28	--
Operating Temperature	0 to +70	°C
Storage Temperature	-40 to +85	°C
Voltage	5	V DC
Dimensions	33 x 13 x 11	mm

*Above specifications are for device without connectors.

ORDERING CODES

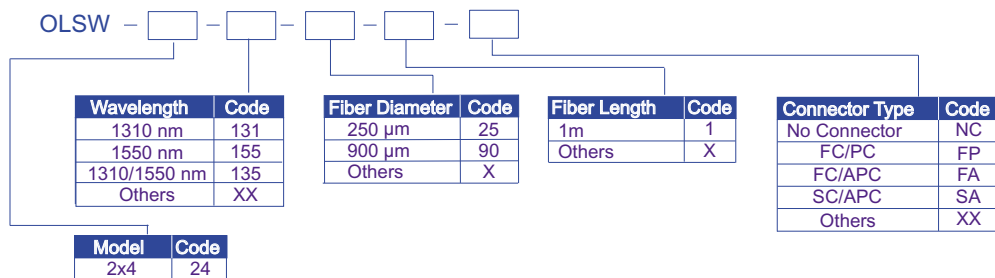

■ Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2007 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com