




Opto-Link
Corporation Ltd

PM Fiber Positioner

SPECIFICATIONS

Polarization Maintaining Fiber Positioner

Parameter	Single Fiber	Units
Center Wavelength	1060, 1310, 1550 or Specify	nm
Capillary Diameter	1.8	mm
Capillary Length	4.75 \pm 0.20	mm
Wedge Angle	8, 12, 15	degree
Wedge Angle Tolerance	\pm 0.50	degree
Fiber Orientation Ref. to Wedge Angle	Refer to Diagram	
Fiber Type	RC PM Bow-Tie Fiber	
Fiber Length	0.5, 1.0 or Specify	m
Extinction Ratio	> 23 (Typ. 27)	dB
Scratch/Dig	10/5	
AR Coating	R < 0.25% @ 1310 or 1550 \pm 40nm, R < 0.30% @ 1060 \pm 20nm	

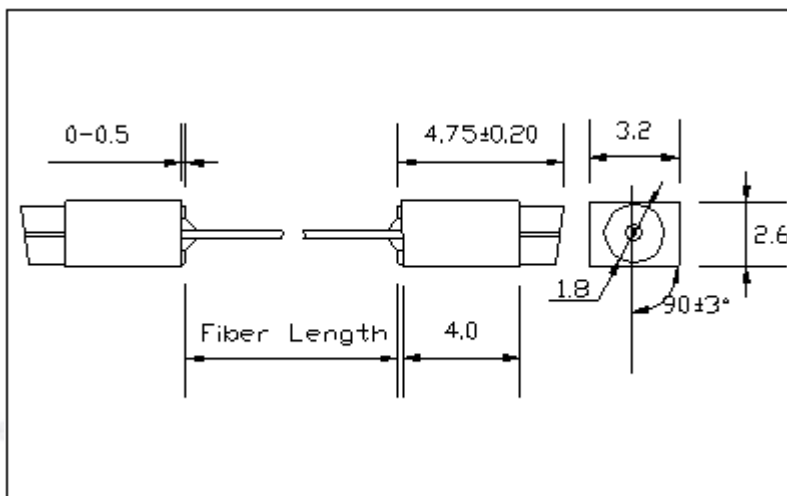

ORDERING CODES

OLFP - [] - [] - [] - [] - []

Type and Wavelength	Code	Connector Type	Code	Buffer Type	Code	Wedge Angle	Code
Polarization Maintaining	1060nm	No Connector	NC	RC PM Fiber	RC	8 degrees	08
	1310nm					12 degrees	12
	1550nm					15 degrees	15

Fiber Length	Code
1m	1
Others	X